


# Light Equipment Shelves 10 Product Information

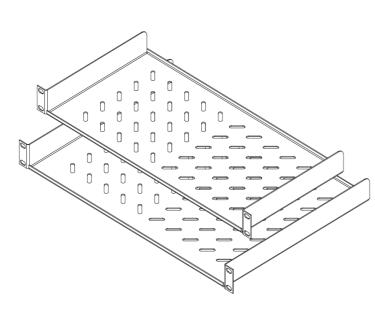

These shelves mount directly to the front of the 19" vertical rails and can support loads up to 10 kg. Ideal for small non-rack mountable devices.

#### Features

- EIA-310E 19" Standard
- Easy to install to the front of the 19" vertical rails.
- 330 and 390 mm depth
- 10 kg load rate
- RoHS compliant
- Conforms to ASTM D610-01 and ASTM B117 (500 hours salt spray test)

## Materials/Finish


• High grade cold rolled steel 1.60 mm thickness.

• Powder coat finish preceded by 5 stage iron phosphate pre treatment.

• Standard color is low gloss black.

Part Code	Description	" <b>A</b> "
SL3301UBLK	Light Equipment Shelves 330 MM 1U Black	330
SL3901UBLK	Light Equipment Shelves 390 MM 1U Black	390

#### Dimensions

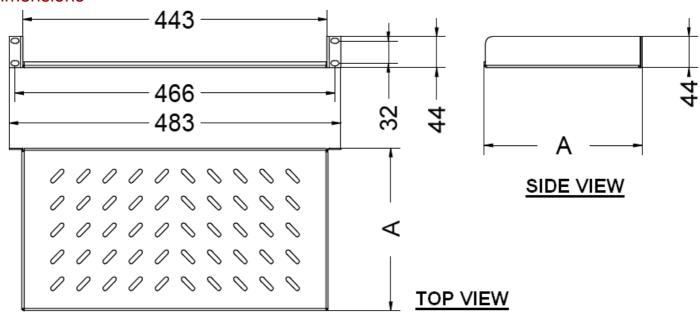




www.chevalgrp.com Tel: +66 2315 1504-5 Fax: +66 2504-575 1504-575 1504-575 1504-575 1504-575 1504-575 1504-575 150

Cheval strives to provide the latest information in all our product literature. Due to our continuous product development program, product appearance, specifications and dimensions may change without notice. To ensure you have the latest information, please contact Cheval or your local representative.






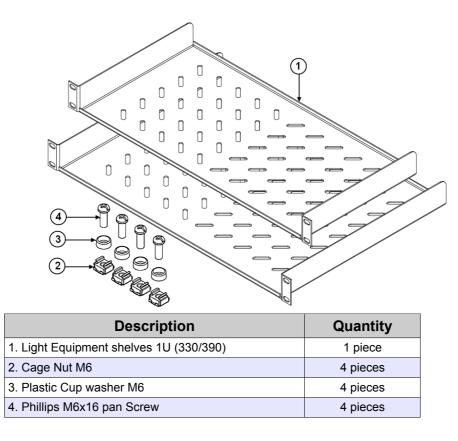

## Installation

- 1. Install Cage nut into proper hole at desired "U" number on 19" mounting rail.
- 2. Put Light Equipment Shelf on the front side of mounting rail
- 3. Insert Phillips screw M6x16 into plastic cup washer then fix these screw and plastic cup washer with Light Equipment Shelf to 19" mounting rail.
  - 4. Align the Light Equipment Shelf in horizontal level then tighten screw with torque 25-30 in lb.

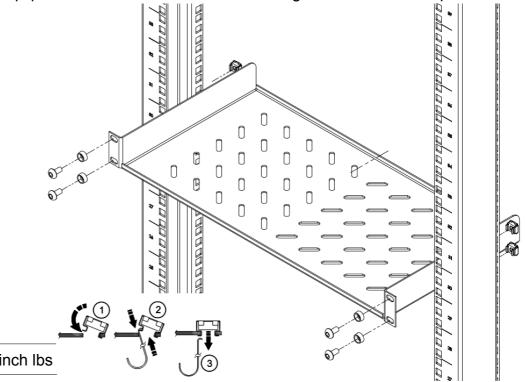

## **Note** : Torque 40-50 inch lbs



www.chevalgrp.com International Inquiries : Email: commce@chevalgrp.com Tel: +66 2315 1504-5 Fax: +66 2315 1506 Thailand Inquiries : Email: domestic\_sales@chevalgrp.com Tel: +66 2744 1632 Fax: +66 2399 1783

Cheval strives to provide the latest information in all our product literature. Due to our continuous product development program, product appearance, specifications and dimensions may change without notice. To ensure you have the latest information, please contact Cheval or your local representative